



Rating	DC30V 100mA	Electrical Life	300,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC500V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	110±30gf max

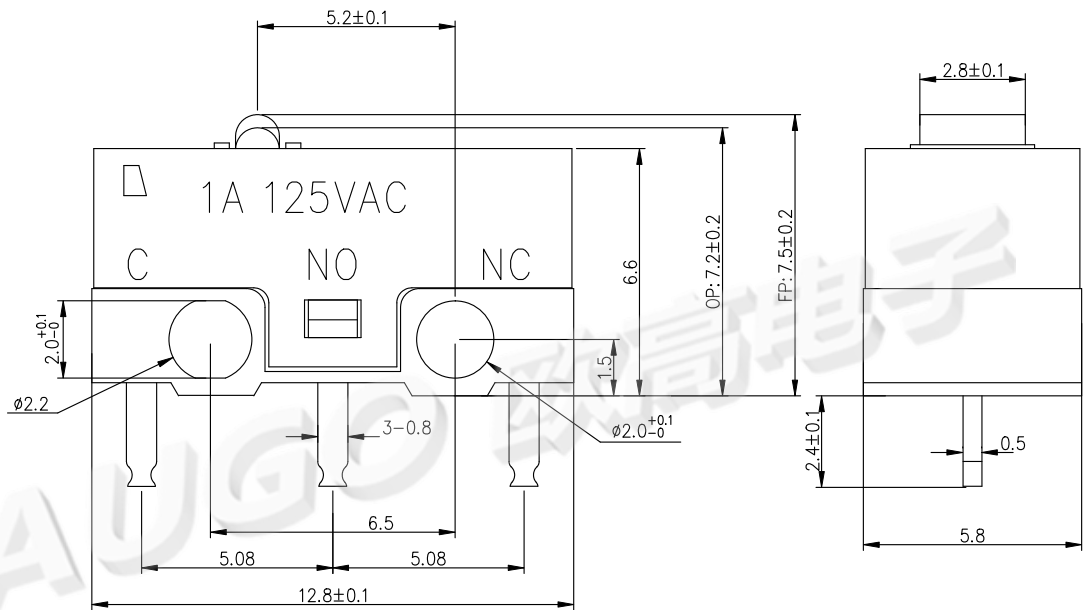

7	压柄	SUS	
6	触点	银合金	
5	端子	C2680	镀银
4	弹片	C5210	
3	按钮	PBT	白色
2	上盖	PBT	黑色
1	底座	PBT	白色
序号	名称	材料	备注

DRAWING NO.				MODIFIED REMEMBER	
MODEL NAME		DM1-00P1-110-3		1	
TOLERANCE		±0.2		2	
Triangle Method				3	
UNIT	m.m.	EDITION	B/0	4	
DRAWN		CHECKED		5	
DONGGUAN AUGO ELECTRONICS CO.,LTD.					
APPROVED					