


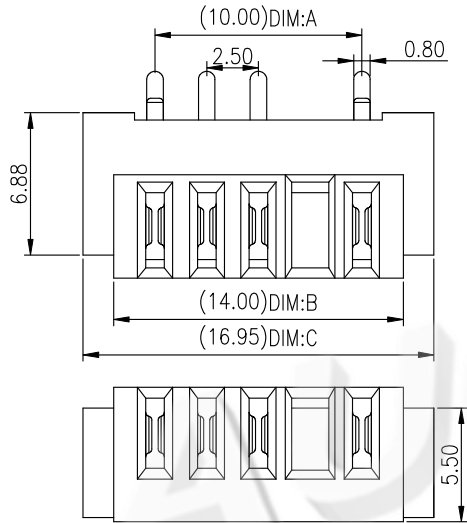


Rohs

REV.	DESCRIPTION	DRAW.	DATE.

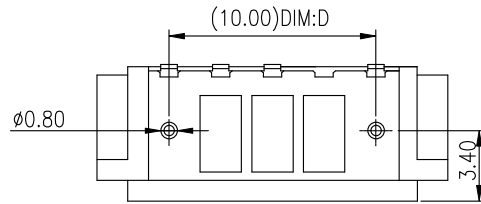

Recommended P.C.B Layout
Layout Tolerance=+/-0.05mm

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	7.50	11.50	14.45	7.50
04	10.00	14.00	16.95	10.00
05	12.50	16.50	19.45	12.50
06	15.00	19.00	21.95	15.00
07	17.50	21.50	24.45	17.50
08	20.00	24.00	26.95	20.00
09	22.50	26.50	29.45	22.50
10	25.00	29.00	31.95	25.00

Material:
 Insulator : NYLON 9T (UL94V-0)
 Contact : Phosphor Bronze
 Contact Plated : Gold over Nickel or Tin
 Specification:
 Current Rating : 5A
 Instant Current : 7A
 Voltage Rating : 30V
 Contact Resistance : 30m Ω
 Insulation Resistance : 100M Ω
 Dielectric Voltage : 500V
 Operating Temperature : -25°~85°

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:	TITLE:	BATTERY FEMALE 2.5 PITCH BOARD TO BOARD CONNECTOR	DESIGN	G.C.CHEN	DATE	
SIZE:	A4				X.	±0.20	DRAWING	Y.C.ZHANG
SCALE: 1:1	UNIT: mm	X.x	±0.15	PART NO:	AUGO-B14F-B	CHECK	D.J.WANG	DATE
SHEET: 1/1		X.xx	±0.10			SCALE	1:1	PAGE
		ANGULAR	±2'					