

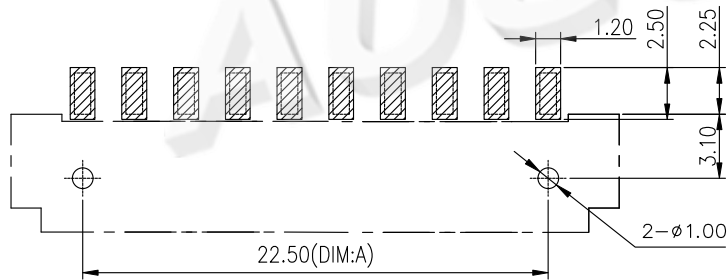
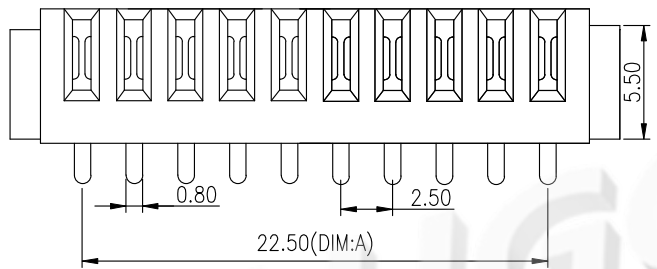


Rohs

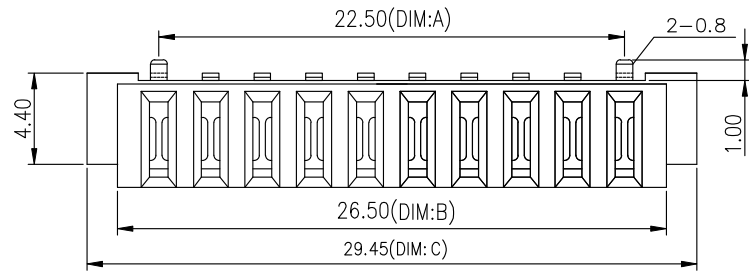

Recommended P.C.B Layout



REV.	DESCRIPTION	DRAW.	DATE.

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	5.00	9.00	11.95	5.00
04	7.50	11.50	14.45	7.50
05	10.00	14.00	16.95	10.00
06	12.50	16.50	19.45	12.50
07	15.00	19.00	21.96	15.00
08	17.50	21.50	24.45	17.50
09	20.00	24.00	26.95	20.00
10	22.50	26.50	29.45	22.50
11	25.00	29.00	31.95	25.00
12	27.50	31.50	34.45	27.50

Material:

- Insulator : NYLON 9T (UL94V-0)
- Contact : Phosphor Bronze
- Contact Plated : Gold over Nickel or Tin
- Specification:
- Current Rating : 5A
- Instant Current : 7A
- Voltage Rating : 30V
- Contact Resistance : 30m Ω
- Insulation Resistance : 100M Ω
- Dielectric Voltage : 500V
- Operating Temperature : -25~85°

AUGO

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:	TITLE:	BATTERY FEMALE 2.5 PITCH BOARD TO BOARD CONNECTOR	DESIGN	G.C.CHEN	DATE		
SIZE:	A4				X.	±0.20	DRAWING	Y.C.ZHANG	DATE
SCALE: 1:1	UNIT: mm	X.x	±0.15	PART NO:	AUGO-B04F-A-SMT	CHECK	D.J.WANG	DATE	
SHEET: 1/1		X.xx	±0.10			SCALE	1:1	PAGE	1 OF 1
		ANGULAR	±2°						